



Optical RDO[®] PRO-X Dissolved Oxygen Probe



The In-Situ[®] Rugged Dissolved Oxygen (RDO) PRO-X Probe uses optical technology for measuring dissolved oxygen (DO) in demanding process environments. The U.S. Environmental Protection Agency (EPA) has approved In-Situ RDO methods for use in Clean Water Act programs.

NPDES permit holders can use the RDO PRO-X Probe and Con TROLL[®] PRO System for monitoring influent, effluent, and treatment processes. Visit the In-Situ website for details and start using breakthrough technology.

Simple Design

- Automates setup and reduces user error—Calibration coefficients are loaded into sensor cap.
- Eliminates membranes and filling solutions
- Flexible communications—Standard 4-20 mA, Modbus/RS485, and SDI-12 outputs

Cost Effective

- Runs aerators efficiently and mitigates risks
- Eliminates the need for a costly transmitter or controller, and requires only 8 to 36 VDC power
- Includes probe with a standard 10-m cable (custom cable lengths available)

Robust Construction

- Resists abrasion and photobleaching effects
- Withstands high salinity environments—Inert, non-corrosive materials used to construct probe body and sensor
- Insensitive to interferences that plague membrane-based sensors (hydrogen sulfide, chloride, ammonium, and others)

Accurate Results

- Includes diagnostic tools to help you evaluate sensor health
- Provides ± 0.1 mg/L accuracy from 0 to 8 mg/L; ± 0.2 mg/L accuracy from 8 to 20 mg/L; and $\pm 10\%$ of reading from 20 to 50 mg/L
- Operates with very low drift for long periods of time
- Responds quickly to oxygen and temperature changes
- Delivers consistent, reproducible results (< 0.05 mg/L)

Applications

- Municipal/industrial water and wastewater treatment
- Food/beverage process control
- Aquaculture settings
- Dam discharge monitoring

Optical RDO[®] PRO-X Dissolved Oxygen Probe



RDO PRO-X Oxygen Probe

Sensor type	Optical DO probe uses RDO-X Sensor Cap
Range, DO	0 to 50 mg/L
Accuracy, DO	±0.1 mg/L, 0 to 8 mg/L; ±0.2 mg/L, 8 to 20 mg/L; ±10% of reading, 20 to 50 mg/L
Resolution, DO	0.01 mg/L
Response time, cap	T90: <45 sec. T95: <60 sec. @ 25° C
Range, temp.	0° to 50° C (32° to 122° F)
Accuracy, temp.	±0.1° C typical
Resolution, temp.	0.01° C
Salinity comp.	Fixed or real-time capable
Barometric comp.	Fixed or real-time capable
Methods	EPA-approved In-Situ [®] RDO methods 1002-8-2009, 1003-8-2009, 1004-8-2009 Standard Methods 4500-O

Environmental Ratings

Pressure	150 psi from 0° to 50° C; 300 psi @ 25° C
Depth	689 ft (210 m) @ 25° C
Operating temp.	Probe: 0° to 50° C (32° to 122° F)
Storage temp.	Sensor cap: 1° to 60° C (33° to 140° F), in factory container

Compliance	Heavy industrial, IEC 61000-6-2:2005
IP rating	IP-67 with cap off; IP-68 with cap installed

Chemical Ratings


Interferences	Alcohols >5%; hydrogen peroxide > 3%; sodium hypochlorite (commercial bleach) > 3%; gaseous sulfur dioxide; gaseous chlorine
----------------------	------------------------------------------------------------------------------------------------------------------------------------

General Ratings

Comm. output	Modbus/RS485, SDI-12, 4-20 mA
Power requirements	8 to 36 VDC
Power consumption	Maximum: 50 mA at 12 VDC
Cable lengths	Modbus and 4-20 mA: Up to 1219 m (4000 ft) SDI-12: Up to 61 m (200 ft)

Int. mounting thread	1-1/4 NPT
-----------------------------	-----------

Warranty	Probe: 3 years from date of shipment Cap: 2 years in typical applications
-----------------	------------------------------------------------------------------------------

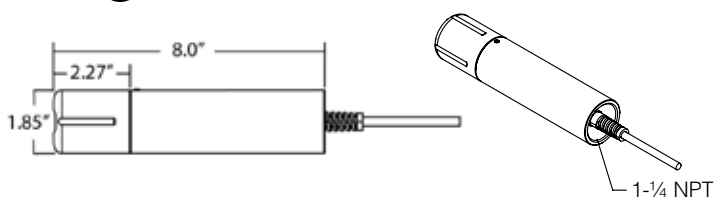


Specifications are subject to change without notice.

Key Advantages

- **Automatic setup**—To eliminate programming errors, the RDO-X Cap is pre-loaded with factory calibration coefficients, serial number, and manufacture date.
- **Fast response**—With patented signal processing, the probe responds quickly and maintains stability, even in dynamically changing conditions.
- **Long-lasting calibration**—The probe maintains calibration and operates with no drift over long-term deployments.
- **Sensor health diagnostics**—Advanced sensor diagnostics allow you to evaluate sensor performance and alert you to maintenance intervals.

Technology

The low-maintenance RDO PRO-X Probe measures DO and provides extremely stable, accurate results. When the probe initiates a reading, a blue LED emits blue light, which excites lumiphore molecules in the sensing element. Excited lumiphore molecules emit red light, which is detected by a photodiode. Oxygen molecules quench the excited lumiphore molecules and prevent the emission of red light—a process called “dynamic luminescence quenching.” Determination of DO concentration by luminescence quenching has a linear response over a range of concentrations.

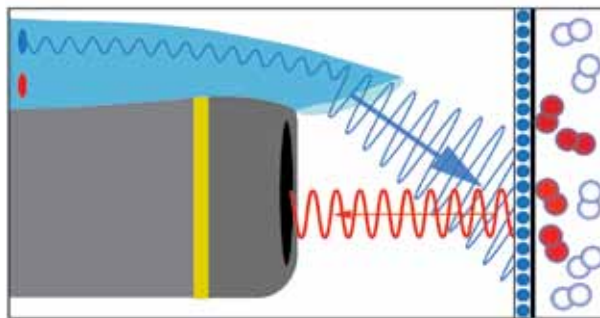

Lumiphore molecules are excited by blue light and then emit red light, which is detected by a photodiode. Optical electronics report DO concentration in mg/L.

Offerings

- **Simplified integration**—Use in conjunction with the Con TROLL[®] PRO System or with SCADA/PLC Systems
- **Flexible power requirements**—Uses 8 to 36 VDC input
- **Integrated communication protocols**—Industry standard Modbus over RS485, SDI-12, or 4-20 mA 3-wire current loop
- **Compliance certified**—CE, FCC Class B heavy industrial immunity and emissions certifications
- **Cable or twist-lock options**—10 m or custom lengths



Call to purchase—www.in-situ.com

221 East Lincoln Avenue, Fort Collins, Colorado, U.S.A. 80524

1-800-446-7488 (toll-free in U.S.A. and Canada)

1-970-498-1500 (U.S.A. and international)

Copyright © 2014 In-Situ Inc. All rights reserved. Nov. 2014 (T4; 500)